

Melody

The oscillating Melody, 3-speed wall-mounted fan, designed in the Art Nouveau style with a grand, arching gooseneck, provides maximum multi-directional airflow with its 90° left to right sweep. Melody can be mounted in small, awkward spaces or in front of HVAC ducts to improve the efficiency of the heating, ventilation or air conditioning of any space.



PHYLUX




MATTHEWS

FAN COMPANY

Melody

Technical Specifications

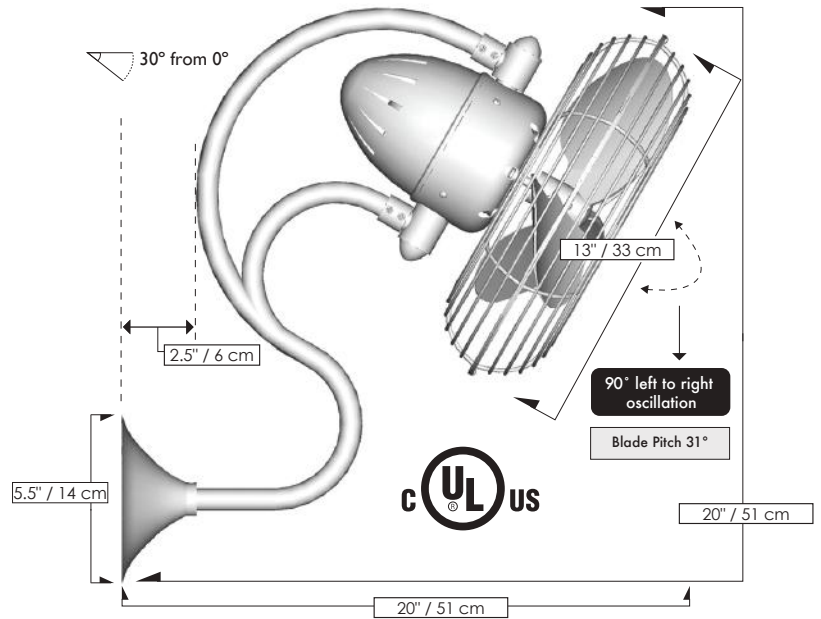

SKU NAMING CONVENTION

SKU#	ME-XX (Model+Finish)
Finishes	Brushed Nickel - BN Polished Chrome - CR Textured Bronze - TB

STANDARD EQUIPMENT

Safety cage

Side-mounted wall junction box

Decora-style,
3-speed wall
control in white



ACCESSORY

3-speed RF
remote control
in black



Note:
The remote control receiver will not fit behind the wall canopy. A clever electrician will need to hide the receiver in wall or ceiling according to code.

FAN SPECIFICATIONS

Fan Diameter	13 inches / 33 cm
Fan Height	20 inches / 51 cm
Fan Projection	20 inches / 51 cm
Fan Weight	14 lbs
Maximum Mounting Height	Approximately 24 inches / 61 cm from ceiling
Fan Guard	Safety cage
Voltage	110 or 220
Motor Type	AC
Blade Pitch	31°
Wall Control	Decora-style 3-speed Note: 3-wire system needed to separately operate fan and oscillating mechanisms. Each fan needs its own control.
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible
Ambience	Soothing white noise
Safety Certification	ETL / CETL
Warranty	Limited Lifetime
MOTOR EFFICIENCY DATA AT HIGH SPEED	
RPM	1445
CFM	1302.65
Watts	47.68
CFM/Watt	27.32